


CELESTION

Truvox 1525

Specifications

Nominal diameter (")	15
Power rating (W)	250
Nominal impedance (Ω)	8
Sensitivity (dB)	98
Voice coil diameter (")	2½
Magnet type	Ceramic
Chassis type	Pressed steel
Cone Material	Kevlar loaded paper

Frequency Response

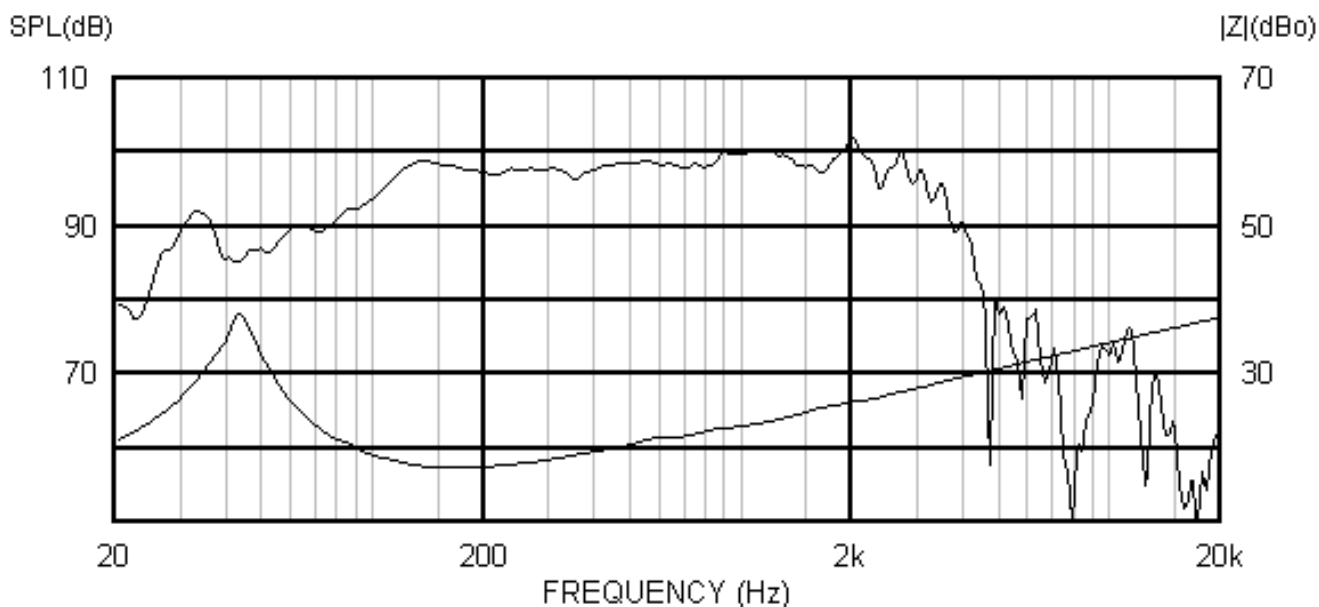

Electroacoustic Specifications

Frequency Range (Hz)	40-3000	Re (Ω)	5.1
Mmt (g)	53.6	D (m)	0.33
Qts	0.45	Vas (L)	247
Qms	4.0	Bl (Tm)	12.8
Qes	0.51	Cms (mm/N)	0.24
Fs (Hz)	40	Rms (kg/s)	4.08

Mechanical Specifications

Diameter (mm)	385	Number of mounting slots	8
Overall depth (mm)	153	Mounting slot PCD (mm)	369
Cut-out diameter (mm)	351	Unit weight (kg)	5.15
Mounting slot dimensions (mm)	9.2 x 6.2		